


📍 10065

Fiat 500
5-speed gearbox

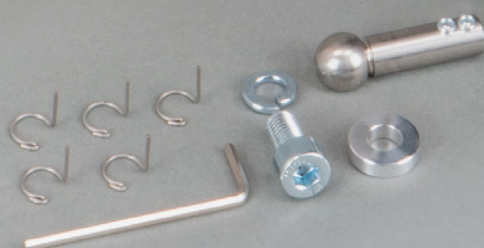

PLEASE NOTE

SAFETY FIRST!

- ⚠ Please only do the installation if you have appropriate experience in the automotive sector and have the right tools! An incorrectly installed Shifter can seriously damage the transmission or make the vehicle undriveable or not shiftable and lead to serious accidents!
- ⚠ If work on the electrical system is necessary, please follow the manufacturer's specifications.
- ⚠ It is essential to leave the ignition switched off when the plugs are disconnected.
Do not leave the car key in the vehicle.
- ⚠ Carry out all work with care and cleanliness! For the professional assembly of a shifter is no force required. All parts are designed to fit your vehicle.
- ⚠ If you are unsure, please contact your trusted workshop about the installation!

BASICALLY

- ⚠ Use ethyl alcohol/brake cleaner to clean all aluminum parts.
- ⚠ Occasionally lubricate all moving parts with spray grease, which has good creeping properties.
Our recommendation: Würth HHS 2000 (WD-40 or similar is unsuitable because it is too thin)
- ⚠ All screws and nuts that are not self-locking or are fitted with tooth lock washers
glue in during assembly!

ⓘ SURFACES AND THEIR CARE

Please note that an untreated aluminum surface (ALU) is sensitive to aggressive Liquids to which i.a. Hand sweat also counts. Especially the high-strength 7075 aluminum we use has a tendency to form black spots of corrosion due to its high copper content. Under special circumstances, very salty air near the sea and coast can lead to corrosion. The surfaces should therefore be cleaned regularly and treated with care to prevent this. For this purpose, e.g. ethyl alcohol or brake cleaner. Only spray these onto a cloth and wipe the shifter with it, NEVER spray the shifter directly. If stains have already formed, they can be removed with commercially available aluminum polish, but that is also not allowed get into the movable parts of the shifter. The anodized versions of our shifters (EXS, EXGR) are more resistant to corrosion. The steel parts have to be also cared in all variants.


TIPS FOR GEAR SHIFTING

ⓘ FORCE DOESN'T MAKES YOU FASTER - IT ONLY HARMS THE TRANSMISSION

The question arises again and again: "Does a CAE shifter puts more strain on a gearbox than a standard gear lever?" The answer is clear: "No!" The things that are most stressful for a synchronizer ring in a transmission are excessive shifting forces or a wrong shift in gear. Basically, the shift travel with a CAE Shifter is significantly shorter than with the standard lever. We achieve 30 - 55 % reduction depending on the vehicle and transmission type. This can only be achieved by using the appropriate gear ratio on the shift lever. You can feel it through the precision of a CAE shifter engaging the gears is much better than with a standard gear lever designed for comfort. The force for this decreases in the same proportion - we put in the gears with significantly less load for the synchronizer rings. In addition, with a correctly adjusted CAE shifter put in the gears is very precise and shifting into the wrong gear is extremely rare. Even in motorsport, fast, precise, but still sensitive shifting leads to the goal! Everything else is pure tugging and tearing (often seen on various YT channels), which looks "important", but in no way makes it faster - but it puts a disproportionately high strain on a transmission and in the worst case causes a fatal wrong shift in gear!

Included in delivery

- ▶ 1x shifter completely monted, design depending on ordered variant (Picture A)
- ▶ 1x Shift knob incl. counter screw M6x20 V2A, design depending on ordered variant (Picture B)
- ▶ Accessories package (Bild C)

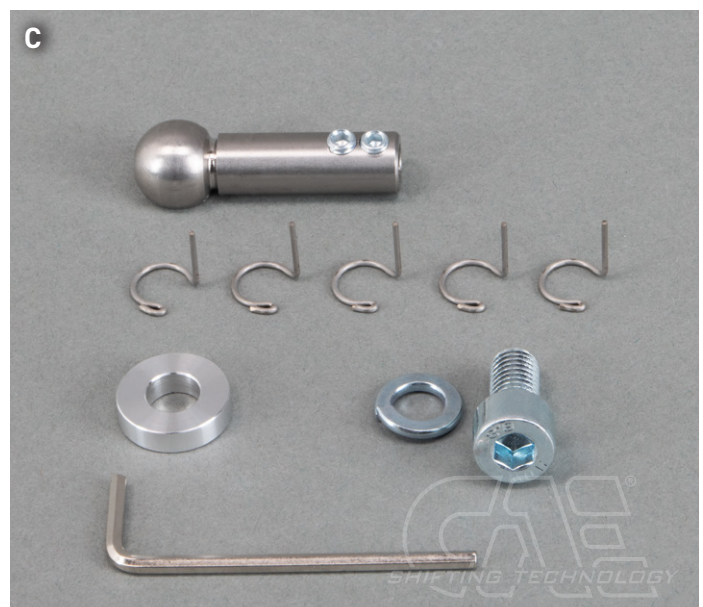

- ❗ The shifter is intended for vehicles with a center console without a side storage compartment. This must be modified for installation according to these installation instructions.
The design of the plastic parts varies depending on the year of manufacture.
- ❗ **PLEASE NOTE:** Glue all nuts / screws during installation!
Use spirit to clean all aluminum parts.
Lubricate all joints regularly, this is the only way to ensure proper functioning in the long term.

The removal

- ▶ Pull the shift boot upwards.
- ▶ Remove the upper cover frame and center console. (Picture 1)
- ▶ Lever the ball cups of the shift cables off the ball heads and use pliers to pull the shift cable retaining clips off the cables. Remove the foam underneath the center console.
- ▶ Remove the original gearshift including the gearshift knob and gearshift bag.
- ▶ Remove the foam element from the bottom of the center console.




Conversion selector cable ball socket

- ▶ Newer models have an adjustable cable end on the selector cable.
- ▶ To mount the center console, this must be converted to the CAE version.

i If the center console is not installed, this step is not necessary.

- ▶ Remove the plastic cable end completely. (Picture 2)
- ▶ File the corrugation smooth until the ball socket fits over it. (Picture 3)
- ▶ Slide the ball socket on completely and tighten the grub screws. (Picture 4)

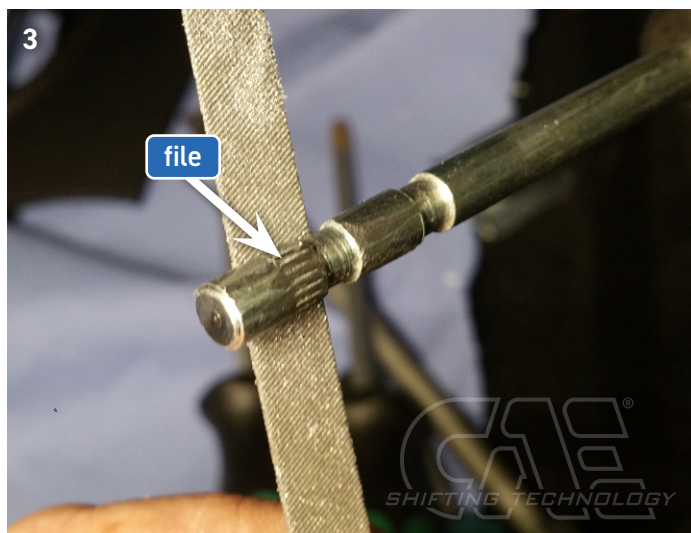


i PLEASE NOTE:

The standard metal ball cups of the older vehicle models do not need to be converted. (Picture 5)





The installation

- ▶ Place the spacer washer on the upper left threaded bolt. (Picture 6a)
On newer vehicles, the original bolt is used here. Always install the spacer washer!
(Picture 6b)

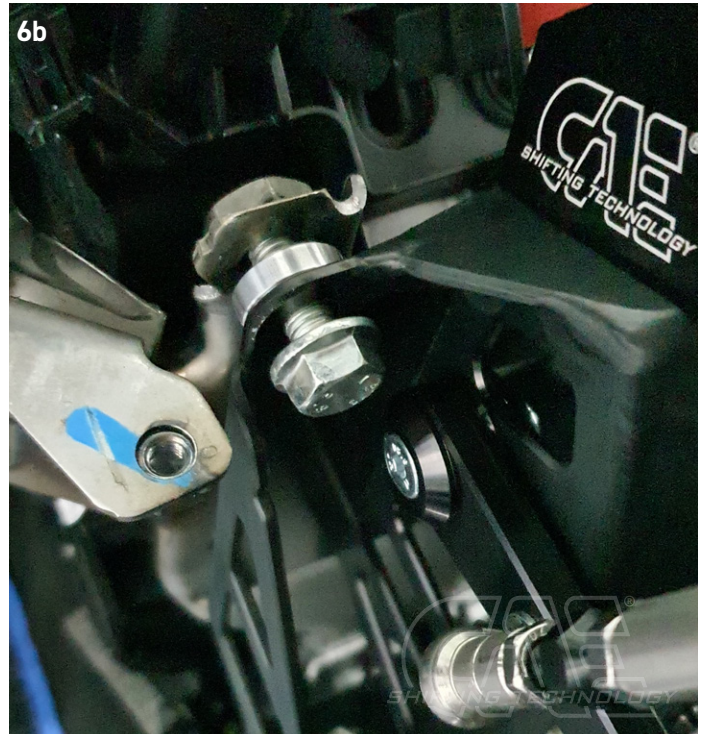


- ▶ Move the CAE shifter into the assembly position and insert the shift cables into the holes on the shifter. (Picture 7)
- ▶ Tighten the shifter. (Picture 8)
- ▶ Fix the shift cables to the shifter housing with the sheet metal clips; a little grease facilitates assembly. If necessary, the clamps must be ground / filed a little narrower. (Picture 7a, Picture 7b)

ⓘ PLEASE NOTE: Regularly spray penetrating oil into the bearing points of the shifter and bell cranks. This is absolutely necessary for proper function. We recommend Würth HHS2000.

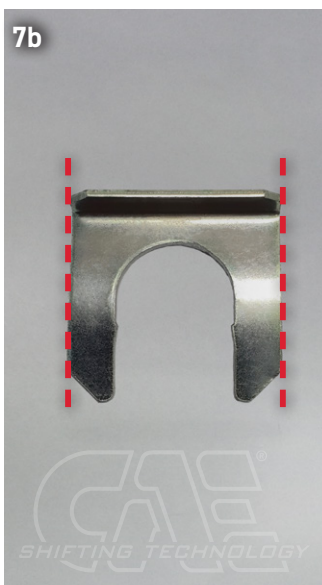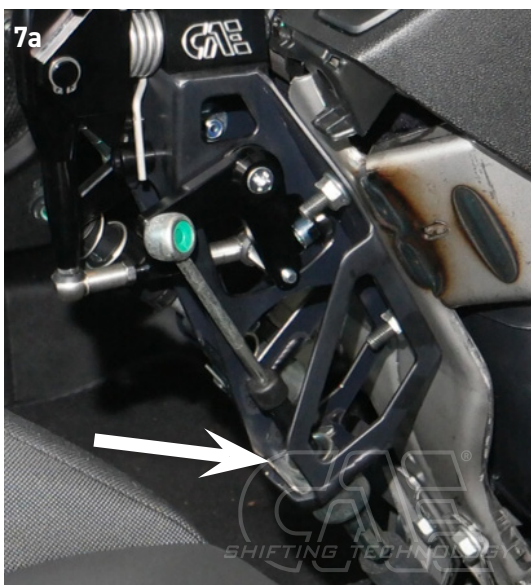

Adjusting the shift travel and check

- ▶ The position of the shift lever can be varied by approx. 4 cm in the direction of travel using the coupling rod at the lower end of the shift lever, coupling rod.
- ▶ In the shortest setting the shift lever is in the rearmost position, in the longest setting it is in the foremost position, making sure that the shift lever does not touch the pin at the top and the rocker at the bottom. (Picture 9)

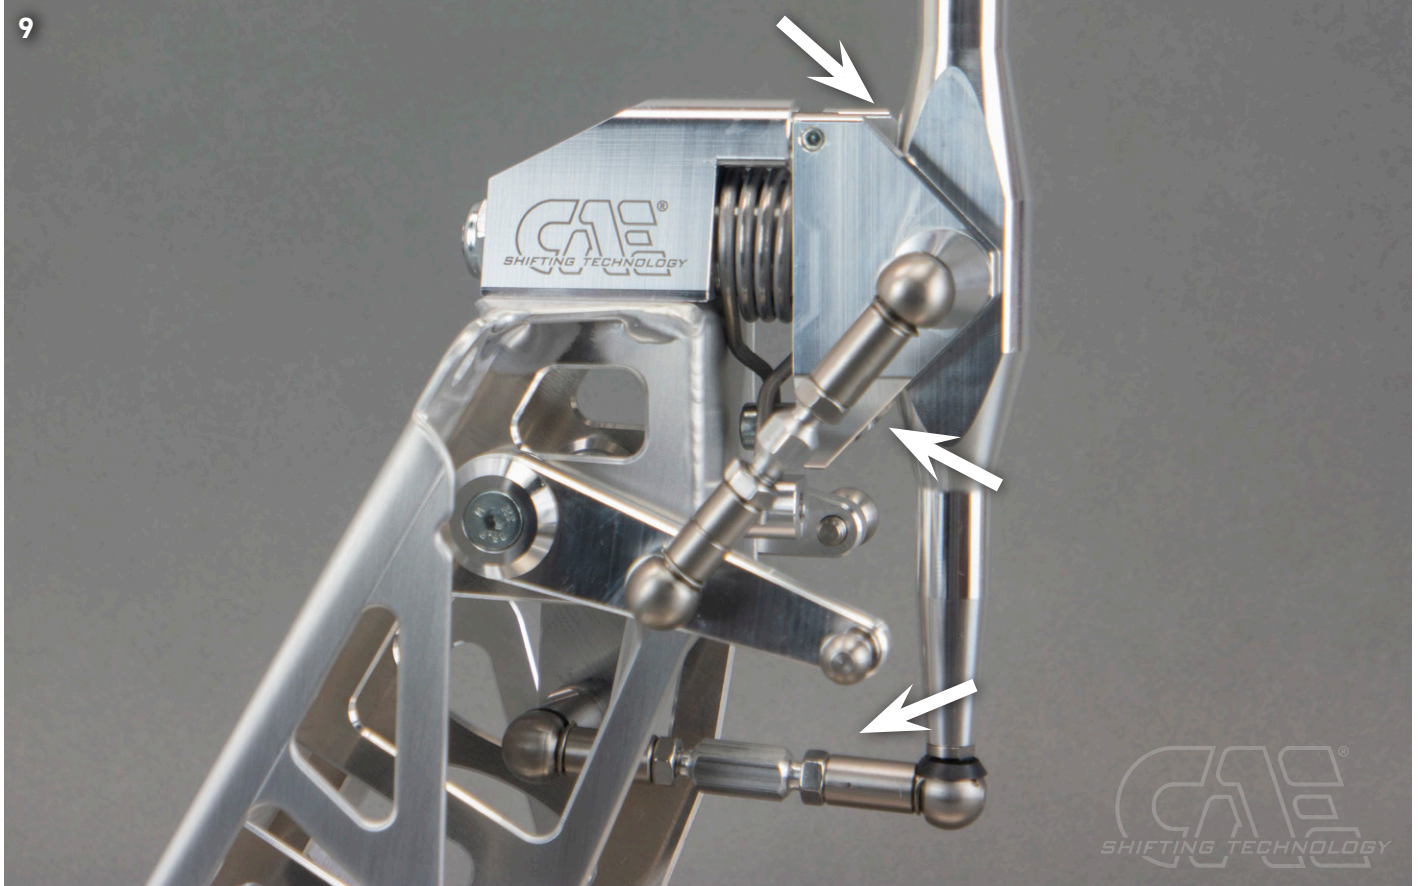

- ▶ Now shift the transmission into 3rd or 4th gear. This is the "middle position" of the gearbox. To do this, move the gearshift lever forwards or backwards without moving it sideways.
- ▶ Now synchronize the center position of the shift lever and transmission at the LEFT coupling rod; with 3rd/4th gear engaged, the clearance at the shift lever must be the same on both sides, otherwise readjust the coupling rod accordingly. adjust accordingly.

- ▶ Tighten the nuts of the left coupling rod, secure the ball cups with the U-clamps. (Picture 10)



- ▶ Adjust the side stops with 2.5mm Allen key, screws are self-locking. (Picture 11)
- ▶ Shift gearbox to level (1/2) using shift lever (search) and adjust right stop screw until gears can be changed cleanly in level 1 / 2. The screw must not touch the bolt when the gear is engaged, approx. 0.5mm clearance is ok.
- ▶ Now shift gearbox to (5/R) gear level using shift lever and adjust left stop screw until 5th / (R) gear can be engaged cleanly. The screw must not touch the bolt when the gear is engaged, approx. 0.5mm clearance is ok..




ⓘ ATTENTION: Reverse gear can only be engaged from neutral, not directly from 5th gear.



FINALLY! Check all functions and settings during the test drive and readjust if necessary!
Incorrect or inaccurate settings can cause damage to the gear box and consequential damage!

Machining center console


- ▶ We recommend the center console without storage compartment: FIAT ART NO 0 735 481 675
- ▶ Edit center console according to the pictures and reinstall it. (Picture 12-18)
- ▶ Check all parts for clearance.

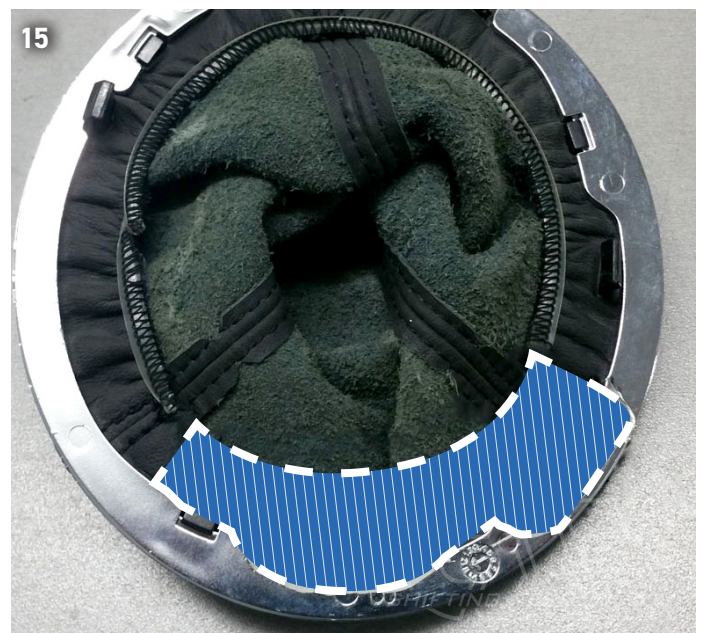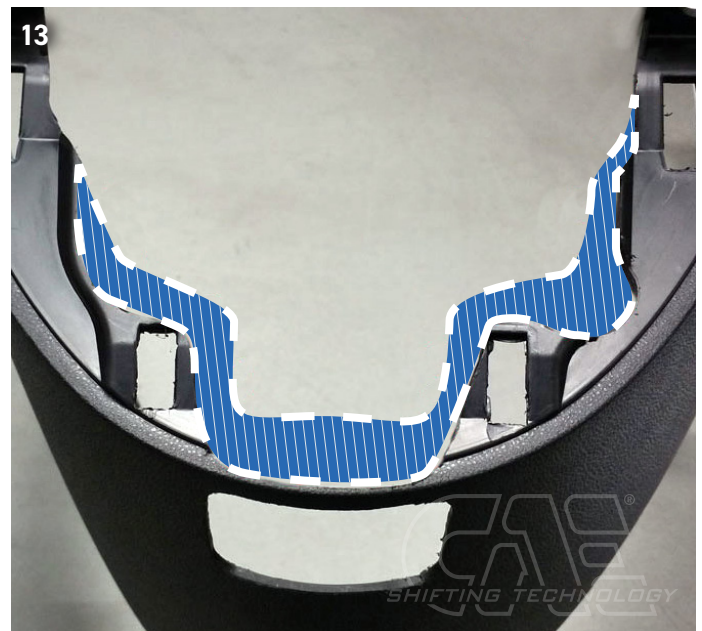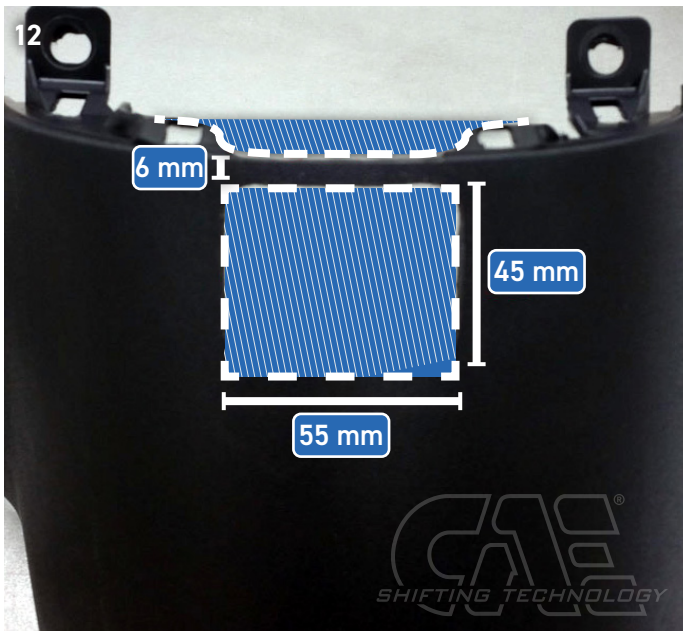

16



17

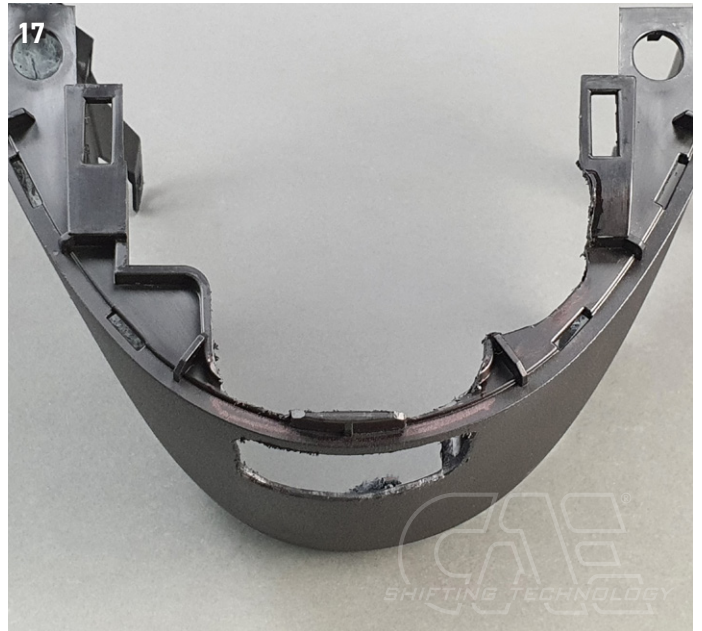

18



If any questions or problems please be sure to contact us, we need YOUR feedback to improve our products.

RACE THE ORIGINAL



Alte Bottroper Strasse 103
D-45356 Essen
0049. 201. 8 777 802
service@cae-racing.de

WWW.CAE-RACING.DE